

ROV Subsea Basket 8,5 Te 4 Point Lift

- Designed with efficiency in mind

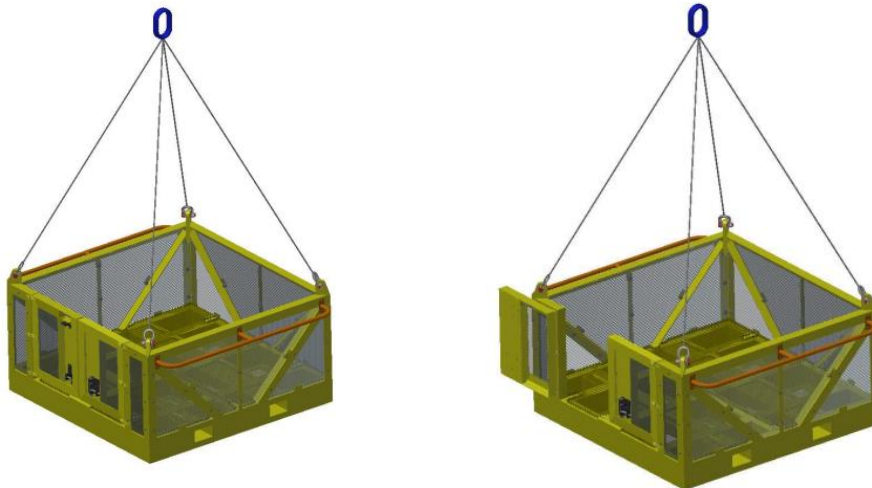


Figure 2 One door Open

Specifications:

- Integrated Forklift Pockets
- Recessed Pivot Links
- Internal measures min. 2.24 x 2.24 x 0.94m
- Max outside dimensions 2,45x2,45x1,25 (1,41m incl lifting Lug)
- SWL/WLL 8,5 Te
- Tare: 2,0 Te
- 2x removable ROV Grabber Bar, placeable on 3 sides
- 2x Wire Rigging
- Double operator Access Door
- Design are performed according to: o Machine Directive 2006/42/EC o DNVGL-ST-E273 Portable Offshore Units o Norsok R-002. • Certification ILO Form No 3 with loads according to DNVGL-ST-E273

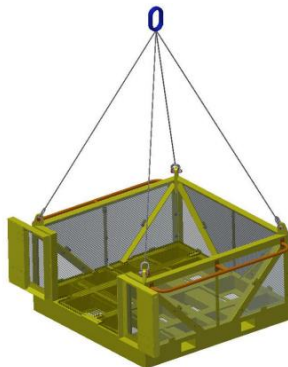


Figure 3 Both doors open