


ROV Flexi Joint

Your Trusted Partner for Offshore Engineering,
Equipment Rental, Personnel & Ship Agent Services

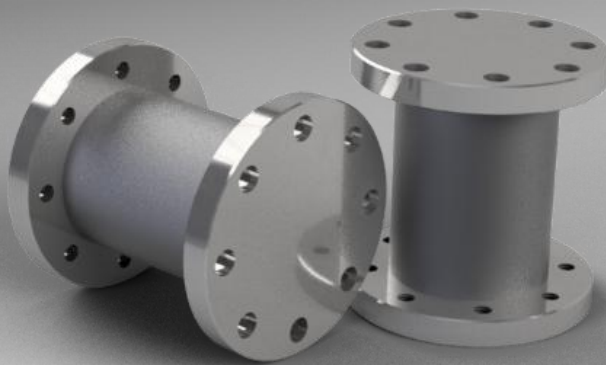

The Flexi Joint is used as a flexible joint between the ROV handle/fishtail and for example an ROV tool. This to avoid damaging the tool or the ROV manipulator. The flexible joint gives you an indication on forces applied and misalignment without applying all force directly to the tool itself or to the manipulator.

**Flexi Joint for ROV
Handles/Fishtails**



E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 23 32) | +47 906 94 490

ROV

Flexi Joint

Technical specifications:

Material:	AISI 316L Stainless- Steel.
Weight in air:	0,6 kg.
Height:	74 mm.
Width	Ø: 70mm OD
Flange 1:	Threaded M6 x 8
Flange 2:	Through hole for M6 x 4/8

E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 23 32) | +47 906 94 490

Flexi Joint for ROV
Handles/Fishtails

