


# Manip Operated Valve

---

Your Trusted Partner for Offshore Engineering,  
Equipment Rental, Personnel & Ship Agent Services

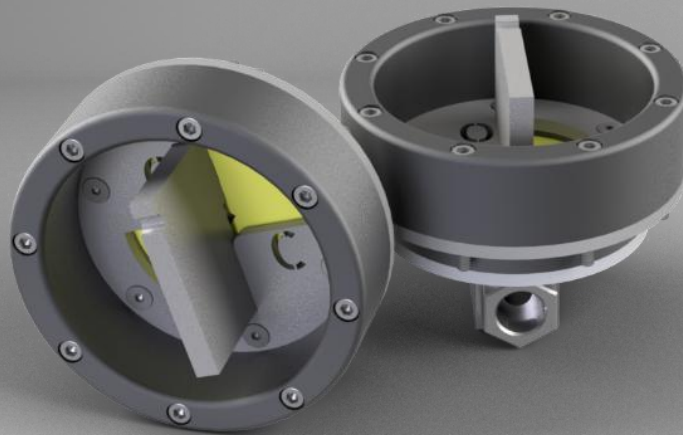

E-mail: [post@sagasubsea.no](mailto:post@sagasubsea.no) | Tel: +47 52-SUBSEA (52 78 23 32) | +47 904 00 631

The Manip operated valve can be used on a wide range of equipment. The valves are designed to hold both gas and fluids. Frequently used on Gas samplers and Hydraulic valve panels. Its 1/2" BSP bore easily adapts to any system. Valve position is indicated in front with O (open) and C (closed) position. The valves can be purchased separately, or in a panel with your requirements. For example, together with a Subsea Gauge.

---


## Manip ROV Valve



# Manip Operated Valve

Technical specifications:

|                       |                       |
|-----------------------|-----------------------|
| Valve OD:             | 150 mm.               |
| Valve ID:             | 120 mm.               |
| Mounting Hole:        | 122 mm.               |
| 8pcs intreface Holes: | 8 x Ø:6mm @ Ø:135 mm. |
| Valve Type:           | 90 deg Ball Valve.    |
| Work Pressure (Max):  | 500 bar.              |
| Valve Bore:           | 1/2 inch BSP.         |
| Weight in Air:        | 3 kg.                 |
| Valve body material:  | 316-L.                |

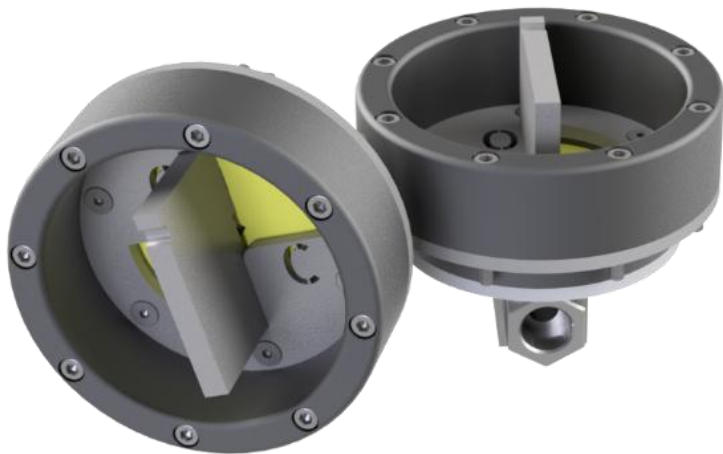

E-mail: [post@sagasubsea.no](mailto:post@sagasubsea.no) | Tel: +47 52-SUBSEA (52 78 23 32) | +47 904 00 631

Manip ROV Valve