


Saga Subsea 4” ROV Dredger

Your Trusted Partner for Offshore Engineering,
Equipment Rental, Personnel & Ship Agent Services

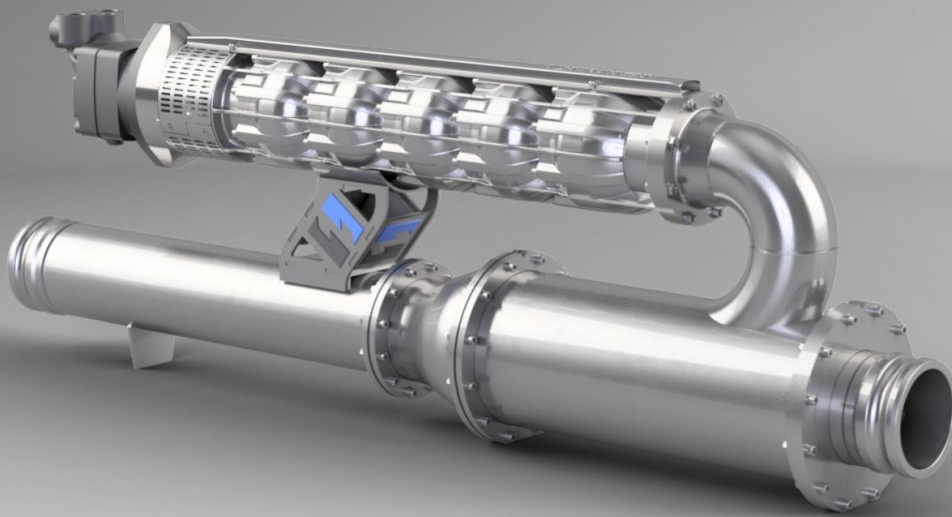

The Saga 4” ROV Dredger is delivered as a complete kit including 5meter length hydraulic hoses. 3meter suction hose with nozzle, 1meter exhaust, 4” Cam-Lock connections on suction and exhaust and hose clamps. If any other items or lengths on suction or exhaust, we can deliver all upon request.

Saga Subsea 4” ROV Dredger

Technical specifications in the table below, all values should be respected to achieve the best possible performance of the tool. Should an issue occur please contact SagaSubsea

General Technical Data:	
Dimension: (LxWxH)	1270 x 210 x 470 mm
Weight in air:	65 kg
Weight in water:	56 kg
Conduit size:	100 mm
Hydraulic Requirements	
Max working pressure:	200 bar
Flow rate:	30-60 l/min
Pressure port:	JIC 12
Return port:	JIC 16
Drain port:	JIC 8
Oil type:	Tellus S22 (Standard, not restricted to)
Max theoretical rock size:	90 mm
Flow Capacity Data	
Flow rate exhaust (Water):	240 m ³ /h (4 000 lpm)
Removal Capacity:	30 m ³ /h (Depending on operational handling)
Materials:	Conduit, pump and nozzle: AISI 316L. Motor: Coated Cast Steel
Note:	Shipment also includes 3meter suction hose, with dimension 4inch.

E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 23 32) | +47 904 00 631