


Saga Subsea ROV Flexi Joint

Your Trusted Partner for Offshore Engineering,
Equipment Rental, Personnel & Ship Agent
Services

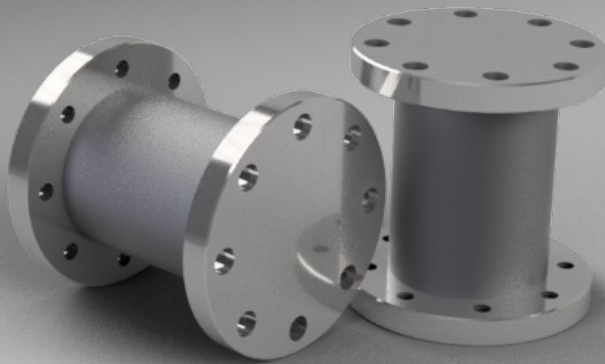

The Flexi Joint is used as a flexible joint between the ROV handle/fishtail and for example an ROV tool. This to avoid damaging the tool or the ROV manipulator. The flexible joint gives you an indication on forces applied and misalignment without applying all force directly to the tool itself or to the manipulator.

E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 23 32) | +47 904 00 631

ROV Flexi Joint



Saga Subsea ROV Flexi Joint

Technical specifications:

Material:	AISI 316L Stainless- Steel.
Weight in air:	0,6 kg.
Height:	74 mm.
Width:	Ø: 70mm OD
Flange 1:	Threaded M6 x 8
Flange 2:	Through hole for M6 x 4/8

E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 23 32) | +47 904 00 631

ROV Flexi Joint

