
SAGA SUBSEA

EAGLE SHEARS SH550

Your Trusted Partner for Offshore Engineering, Equipment Rental, Personnel & Ship Agent Services

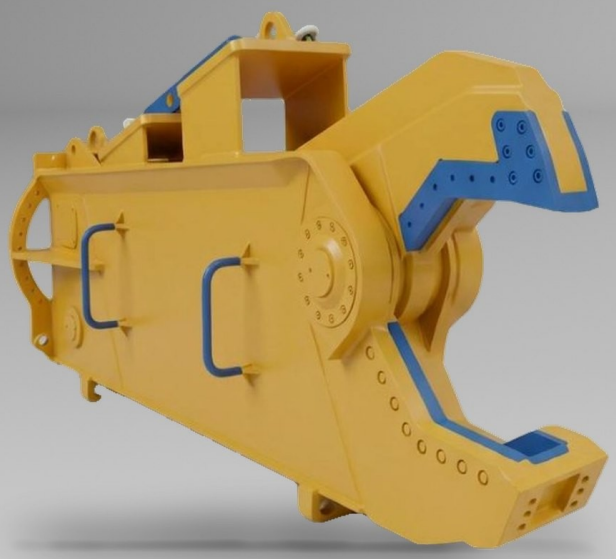

E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 27 32) | +47 904 00 631


Eagle Shears SH550 is a hydraulic subsea shear with 478 Te cutting force at 350 bar and a jaw opening of 760 mm. It is delivered with a dedicated 2-part chain bridle. A single pad-eye on the aft side and a lift plate on top allow the shear to be operated at different angles, and four handles give the ROV a secure grip for positioning.

SAGA SUBSEA

EAGLE SHEARS SH550

Technical specifications:

Cutting capacity:	478 Te (centre blade)
Operating pressure:	350 bar (max)
Flow:	275 l/min (max)
ROV interface:	4 x handles 400 mm, ø30 mm bar
Dimensions (LxWxH):	3950 x 920 x 1490 mm (jaws open)
Weight in air:	5.34 Te (est.)
Weight in water:	4.65 Te (est.)
Jaw opening:	760 mm
Hydraulic connection:	SAE 6000 psi x 1" BSP F
Lifting points:	Pad-eye 25 Te, lift plate 25 Te WLL

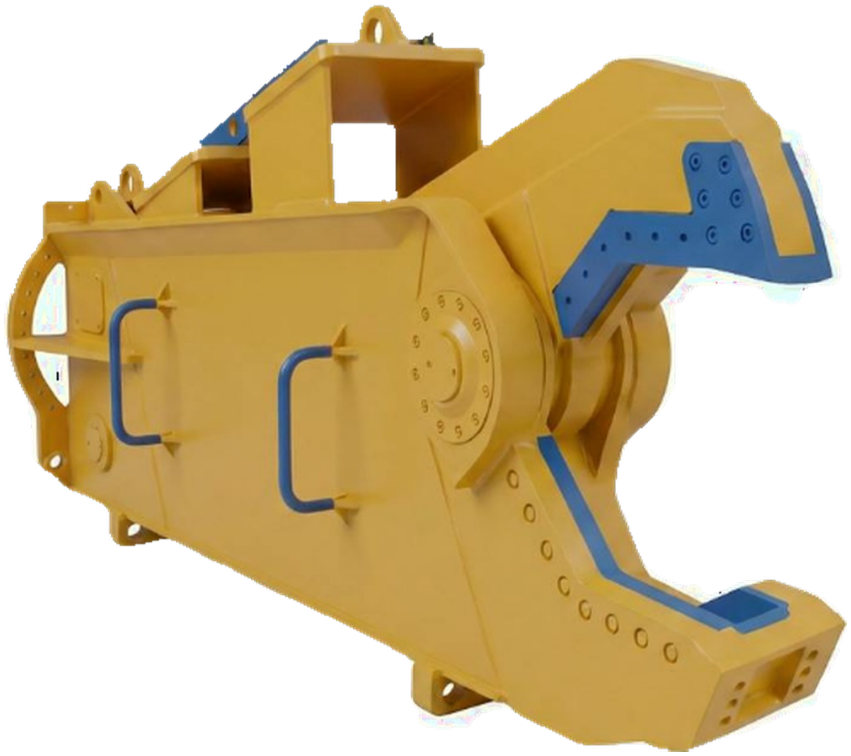

E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 27 32) | +47 904 00 631