
SAGA SUBSEA

6” ROV DREDGER

Your Trusted Partner for Offshore Engineering, Equipment Rental, Personnel & Ship Agent Services

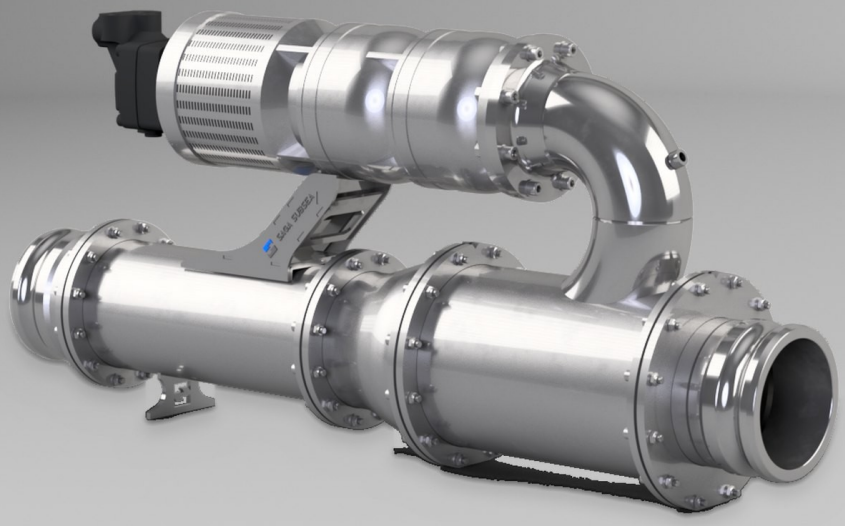

E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 27 32) | +47 904 00 631

The Saga 6” ROV Dredger is delivered as a complete kit: 5 m hydraulic hoses, 3 m suction hose with nozzle, 1 m exhaust hose, 6” Cam-Lock connections on suction and exhaust, and hose clamps. Other items and suction or exhaust lengths are available on request.

SAGA SUBSEA

6” ROV DREDGER

Technical specifications:

General Technical Data:	
Dimension: (LxWxH):	1167 x 270 x 521 mm
Weight in air:	93 kg
Weight in water:	79 kg
Conduit size:	152 mm
Hydraulic Requirements:	
Max working pressure:	200 bar
Flow rate:	50-60 l/min
Pressure port:	JIC 12
Return port:	JIC 16
Drain port:	JIC 8
Oil type:	Tellus S22
Max theoretical rock size:	140 mm
Flow Capacity Data:	(Depending on operational handling)
Throughput 90% rock:	28 m³/h
Flow rate exhaust (Water):	450 m³/h (7,500 l/min)
Throughput 90% sand:	47 m³/h
Throughput 10% solids:	65 m³/h
Materials:	Conduit, pump and nozzle: AISI 316L. Motor: Coated Cast Steel
Note:	Shipment also includes 3 m suction hose, with dimension 6 inch

E-mail: post@sagasubsea.no | Tel: +47 52-SUBSEA (52 78 27 32) | +47 904 00 631

Released 27.10.2026